


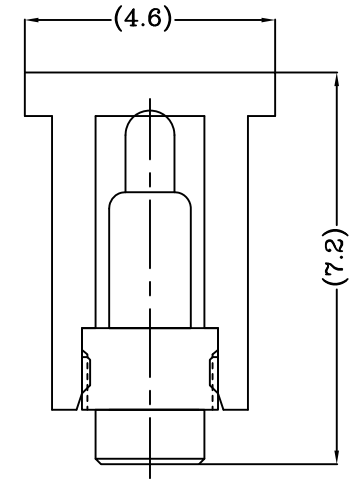
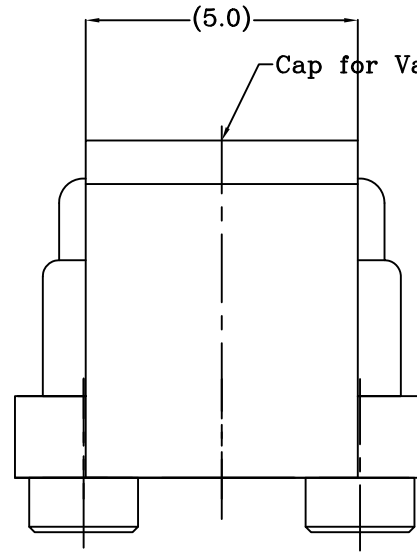


DWN No.: C-100924

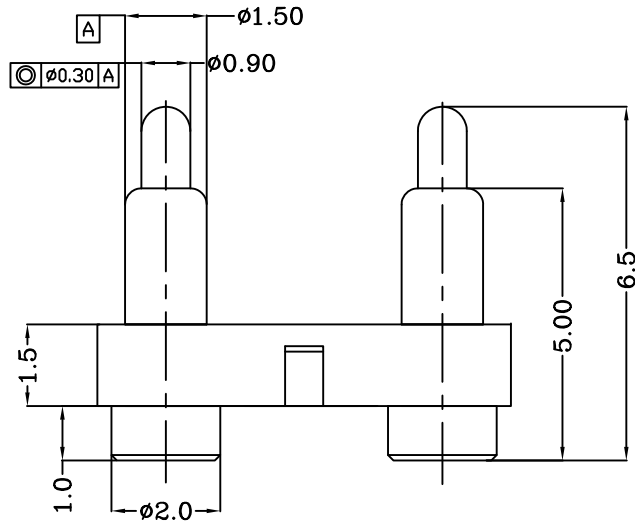

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

**proposal**

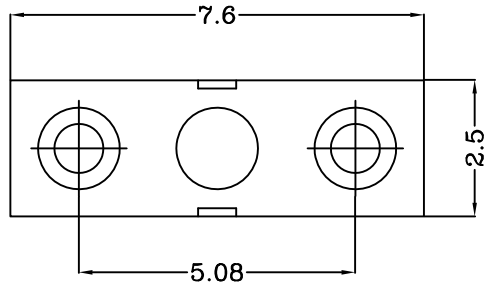

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)  
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- Electrical performance  
Resistance: 30mOhm Max.Current rating: 2.0A
- Packaging Spec.Comformance to EIA 481
- RoHS compliant.

Working height	5.50mm	125±30gf
Durability	10000cycle	

100924-2

PART NUMBER

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Cai wanlu	APVD:		 Top-Link Electronics Ltd.	
0.0	= ± 0.15	CHK:		REL:			
0.00	= ± 0.10	Name		Customer drawing			
0.000	= ± 0.05	Scale	1:1	Size	A4	DWG No.	C-100924
Angle: ±		Page	1/1	Rev.	2		
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.							

DIST

DIST

Rev.	NEW	2012/11/28
Revision record.		Date.

4

3

2

1