


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO.  
C-101084




USED ON  
-

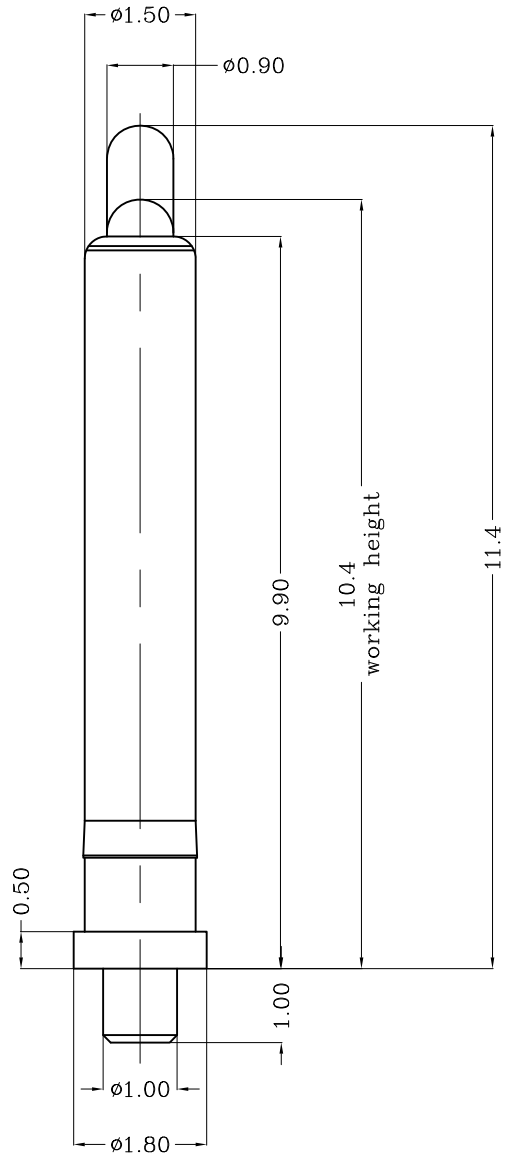

Notes:

△ Material:

- 1)Plunger & Body : Brass
- 2)Spring : Stainless steel wire
- 2 Plating
  - 1)Body: 0.125um Gold plating over min. 1.25um Nickle plating
  - 2)Plunger: 0.5um Gold plating over min. 1.25um Nickle plating
- 3 Mechanical
  - 1)Total stroke : 1.4mm
  - 2)Durability: 10,000 cycle min.
- 4 Electrical
  - 1)Contact resistance: 30mOhm Max.
  - 2)Operating voltage: 36VDC

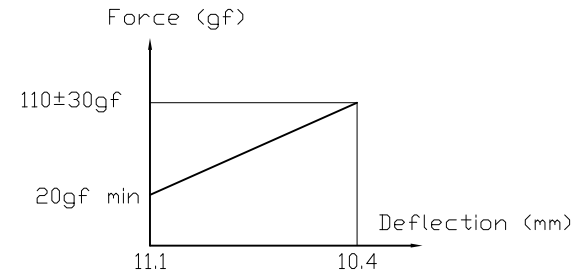

LDC	-
DIST	-

	NEW		2007/12/20
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED  
0 = ±-  
0.0 = ±0.15  
0.00 = ±0.10  
0.000 = ±  
ANGLE: ±1°  
SURF TEXTURE: 3.2/  
REMOVE BURRS. BREAK  
SHARP EDGES R0.05 MAX  
DO NOT SCALE PRINT

MATL	△ 1	HT TR	-	FIN	- ✓
DWN	Benny	APVD	Lansing	<b>top-Link</b> Top-Link Electronics Ltd.	
CHK	Andy	REL		<b>Electronics</b>	
NAME	POGO PIN PG-1.0-1.0-1.7-0.5-1.5-9.9-11.4				
SCALE	1:1	A4	DWG NO.	C-101084	SHEET 1 OF 1
					REV A

101084-1  
PART NUMBER

4

3

2

1