


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-101150



LDC	-
DIST	-

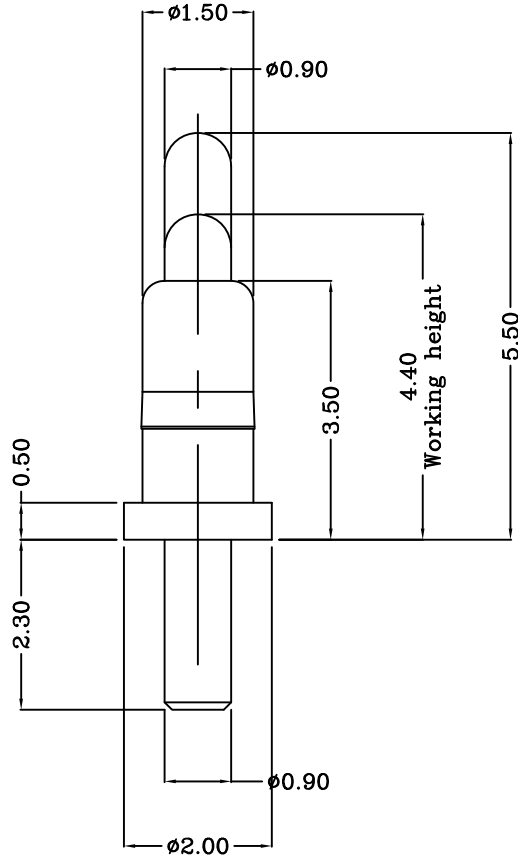


USED ON -

Notes:

△ Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: 0.1um Gold plating over min. 1.25um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.25um Nickle plating
- 3 Mechanical
 - 1)Total stroke : 1.5mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

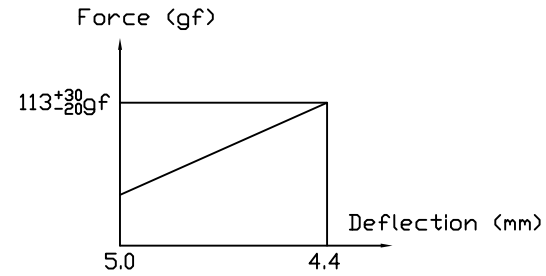

101150-1
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.10 0.00 = ±- 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2/▽ REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL 1		HT TR -		FIN - ✓			
	DWN Benny		APVD Lansing		Top-Link Electronics Ltd.			
	CHK Andy		REL					
	NAME POGO PIN PG-0.9-2.3-2.0-0.5-1.5-3.5-5.5							
LTR	NEW REVISION RECORD	APVD	DATE	SCALE 1:1	A4	DWG NO. C-101150	SHEET 1 OF 1	REV A

4

3

2

1

D

C

B

A