


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.


DWG NO. 101256



USED ON -

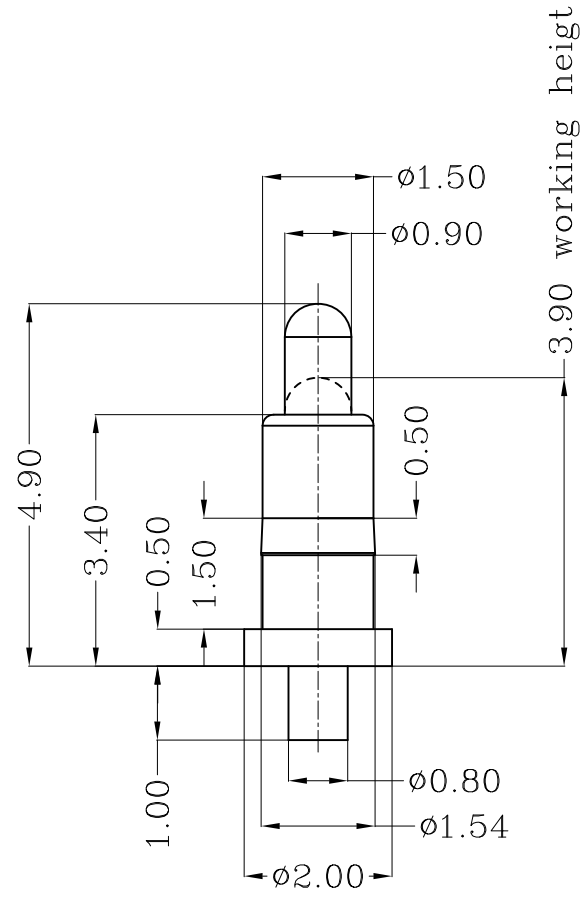

- Notes:
- △ Material:
 - 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
 - 2 Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
 - 3 Mechanical
 - 1)Total stroke : 1.4mm
 - 2)Durability: 10,000 cycle min.
 - 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

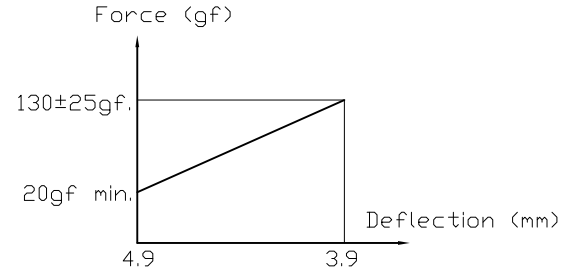

101256-1
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2/▽ REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL	△ 1	HT TR	-	FIN	- ✓						
	DWN	Qin	APVD	Lansing	Top-Link Electronics Ltd.							
	CHK	Jlm	REL									
	NAME	POGO PIN PG-0.8-1.0-2.0-0.5-1.5-3.4-4.9										
LTR	REVISION RECORD	APVD	DATE	SCALE	1:1	A4	DWG NO.	C-101256	SHEET	1 OF 1	REV	A

LDC	-
DIST	-