


DWN No.: C-101423



proposal

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	—————
4				
5				

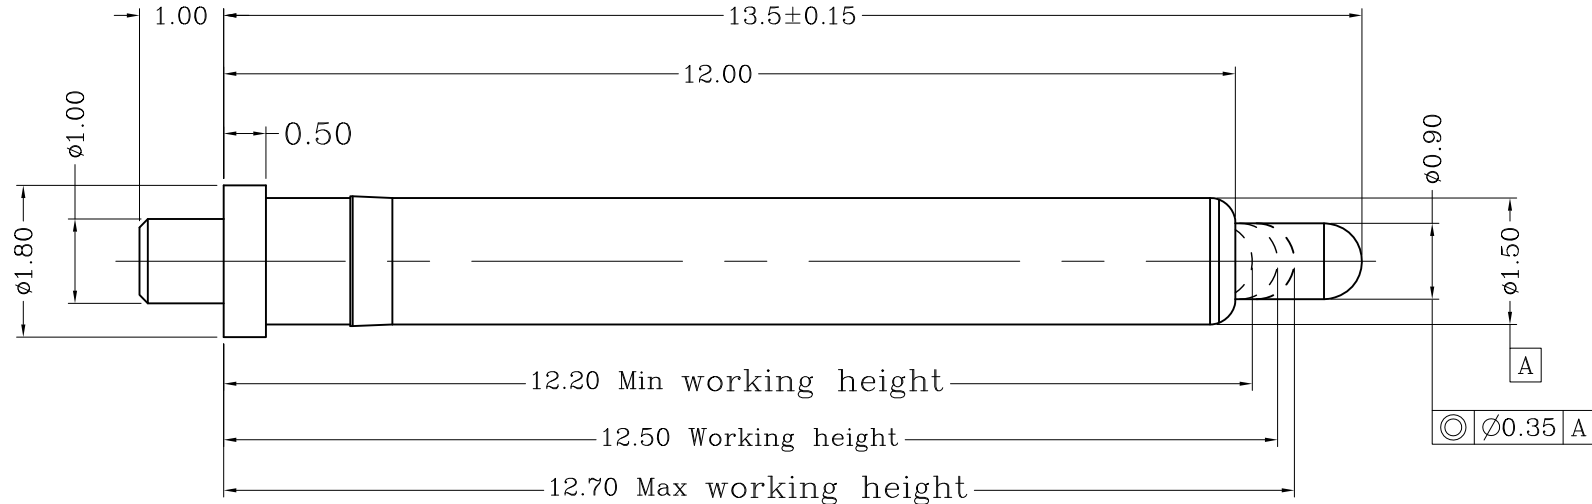

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 <2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
 Resistance: 30mOhm Max.
 Current rating: 2.0A
- RoHS compliant.

Table 1 Mechanical performance		
Working height	12.5mm	110±20gf <2.1>
Durability	10000cycle	

101423-1
PART NUMBER

DIST

DIST

A1	Update	2015/12/26
A	NEW	2010/11/05
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight —————
TOLERANCES UNLESS OTHER SPECIFIED 0. = ± — 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± — Angle: ±' SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		DWN: Cai wanlu	APVD:	 Top-Link Electronics Ltd.
		CHK:	REL:	
Name POGO PIN				
Scale 1:1	Size A4	DWG No. C-101423	Page 1/1	Rev. A1

4

3

2

1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.