


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.: C-101498

proposal

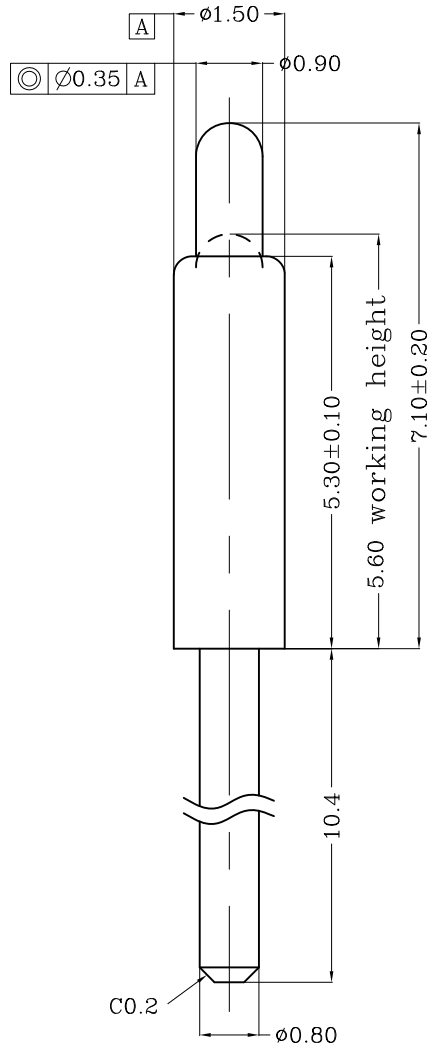

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	0.1um Au over 1.4um Ni
2	Plunger	1	Leaded Brass	0.4um Au over 1.4um Ni
3	Spring	1	Stainless steel wire	—————
4				
5				

Table 1 Mechanical performance		
working height	5.60mm	40±10gf <3.1>
Durability	20000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
<3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

DIST

DIST

Rev.	Revision record.	Date.
	NEW	2011/06/13

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Qin	APVD:	
0.0 = ± 0.15		CHK:	REL:	
0.00 = ± 0.10		Name POGO PIN PG-0.8-10.4-1.5-5.3-7.1		
0.000 = ± 0.05		Scale 1:1	Size A4	DWG No. C-101498
Angle: ± 1°		Page 1/1	Rev. A	
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.				

101498-1
PART NUMBER