


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-100338





LOC	-
DIST	-

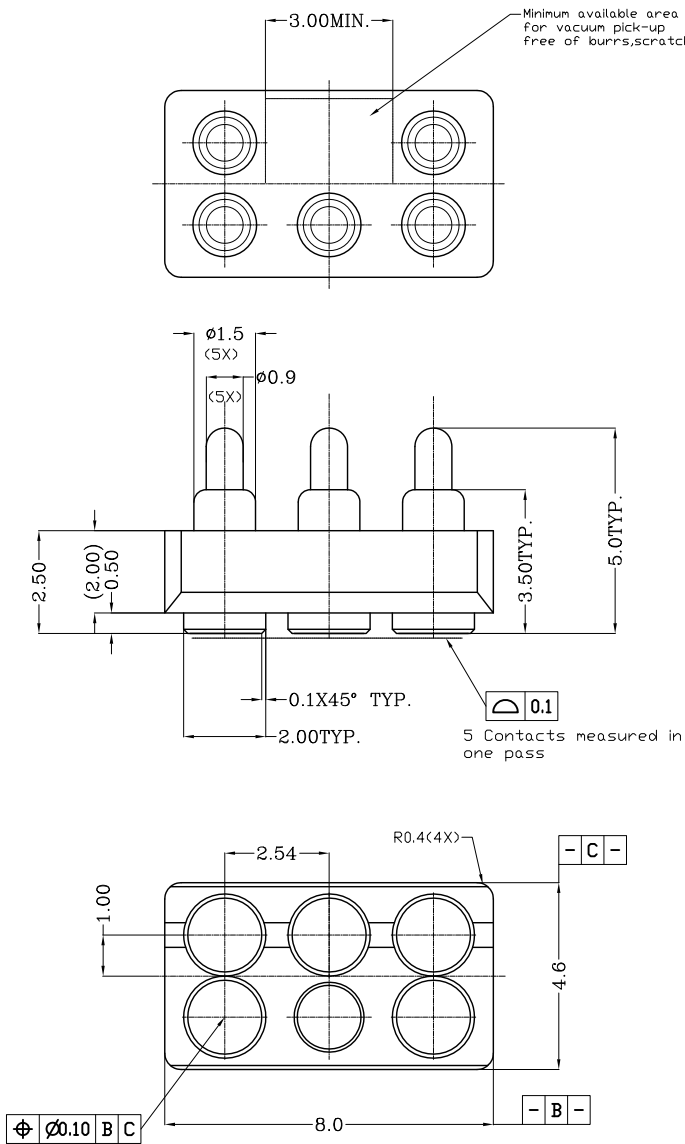

Minimum available area for vacuum pick-up free of burrs, scratches or marks.

Notes:
 1 Material, Housing: PA 4.6 (30% Glass Filled)
 Color Black.
 Contact: Brass
 2 Mechanical demands:
 Plating poston: 0.4um Au over 1.4um Ni
 Plating barrel: 0.1um Au over 1.4um Ni.

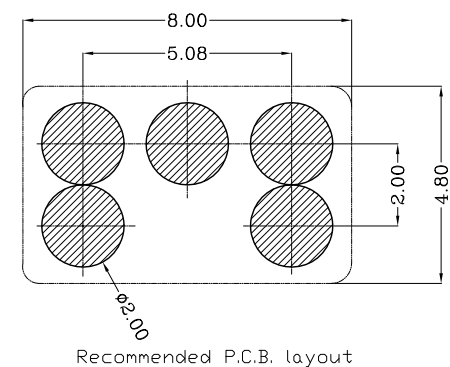

Recommended P.C.B. layout

USED ON _____

⌀0.10 B C

DIMENSIONS IN MM
 TOLERANCES UNLESS
 OTHER SPECIFIED
 0 = ±-
 0.0 = ±0.15
 0.00 = ±0.10
 0.000 = ±
 ANGLE: ±1°
 SURF TEXTURE: 3.2/
 REMOVE BURRS. BREAK
 SHARP EDGES R0.05 MAX
 DO NOT SCALE PRINT

MATL	△ 1	HT TR	-	FIN	- ✓
DWN		APVD		 Top-Link Electronics Ltd.	
CHK		REL			
NAME BATTERY POGO CONNECTOR 5 POSITIONS PGC-1.5-5.0-2R-5P-2.54PH					
SCALE	1:1	A4	DWG NO.	C-100338	SHEET 1 OF 1
				REV	B

UPDATE DRAWING	2014/03/20
REVISION RECORD	APVD
DATE	

100338-5
 PART NUMBER