






proposal

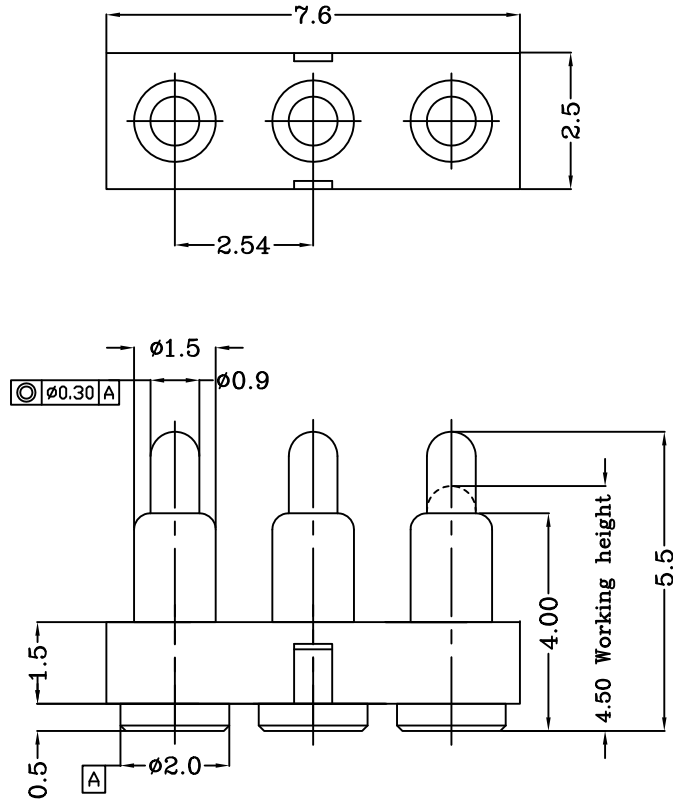

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)  
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.  
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance  
Resistance: 200mOhm Max.Current rating: 1.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

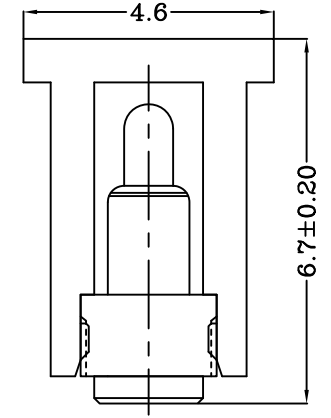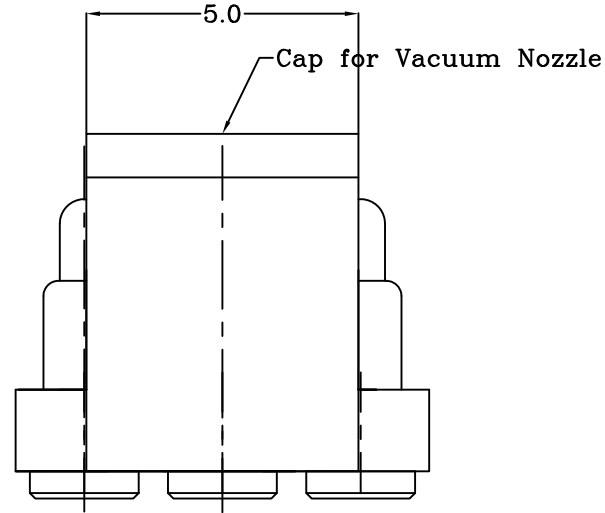

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	

Table 1 Mechanical performance

Working height	4.50mm	35±15gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm	Weight		
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong		APVD:		<div><i><b>top-Link</b></i></div> <div><i><b>Electronics</b></i></div> <div>Top-Link Electronics Ltd.</div>		
0. = ±		CHK:			REL:				
0.0 = ± 0.15									
0.00 = ± 0.10									
0.000= ± -									
Angle: ±1°		Name							
SURF TEXTURE:		Customer drawing							
REMOVE BURRS.									
BREAK SHARP EDGES		Scale	Size	DWG No.				Page	Rev.
R0.05 MAX.DO NOT SCALE PRINT.		1:1	A4		C-100773			1/1	A

**top-Link** Top-Link Electronics Ltd.

100773-3

PART NUMBER

DIST

DIST