






proposal

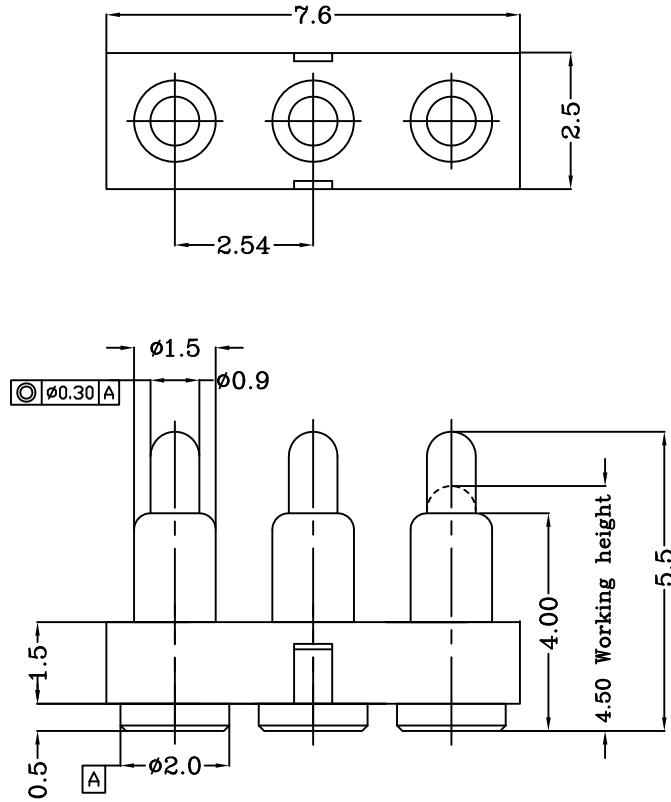

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

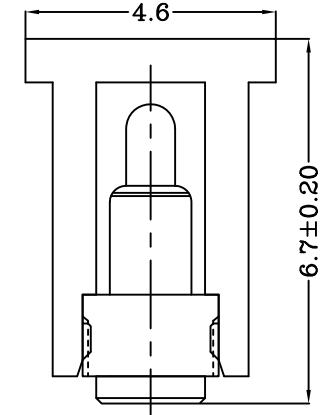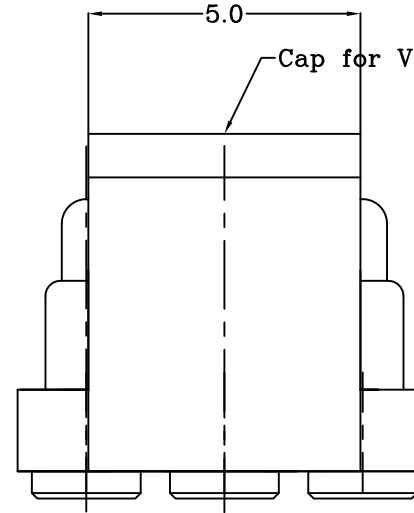

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	

Table 1 Mechanical performance

Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong		APVD:		
0. = ± -		CHK:			REL:	<i>top-Link</i> <i>Electronics</i> Top-Link Electronics Ltd.	
0.0 = ± 0.15							
0.00 = ± 0.10							
0.000= ± -							
Angle: ±1°		Name					
SURF TEXTURE:		Customer drawing					
REMOVE BURRS.							
BREAK SHARP EDGES							
R0.05 MAX.DO NOT SCALE PRINT.		Scale	Size	DWG No.	Page		Rev.
		1:1	A4	C-100774	1/1		1