




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO.
C-110867



USED ON

—

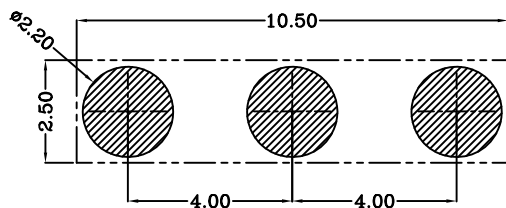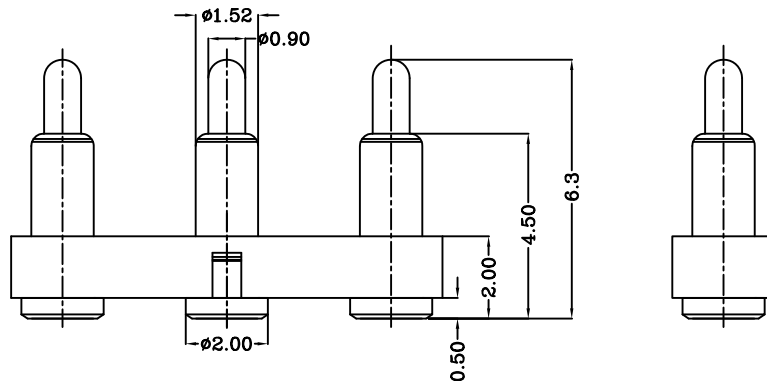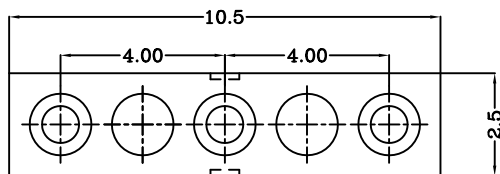

Recommended PCB Layout

Recommended solder patse thickness is 0.10 mm

Notes:

- 1 Material(材质):
Housing: HTN, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire
- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical:
Total stroke(总行程): 1.70mm
Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

LOC
-
DIST
-

	NEW		2009/11/05
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°	MATL			HT TR	—	FIN	— 	
	DWN			APVD				
	Qln							
	CHK			REL				
	NAME							
SURF TEXTURE: 	POGO PIN CONNECTOR 3 POSITIONS PGC-1.5-6.3-R-3P-4.0PH							
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	SCALE	A4	DWG NO.	C-110867		SHEET	REV	
	1:1					1 OF 1	A	

110867-3

PART NUMBER

4

3

2

1