
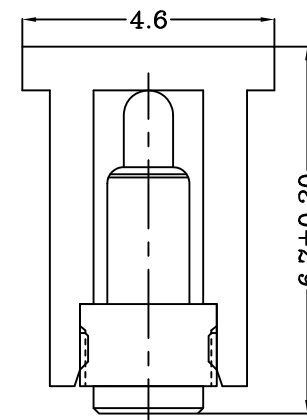
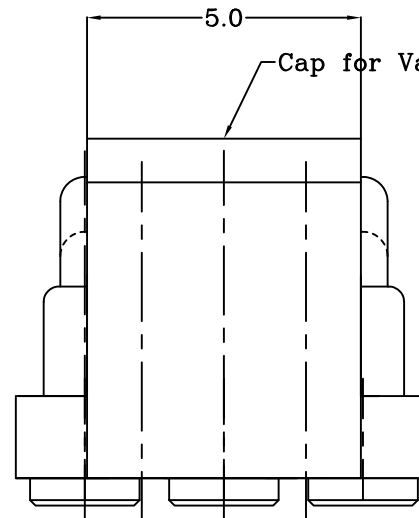
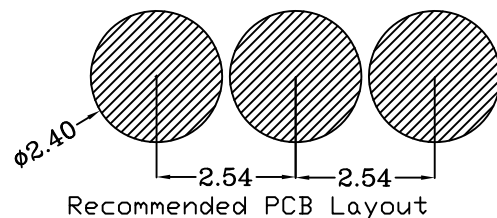


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO.
100632

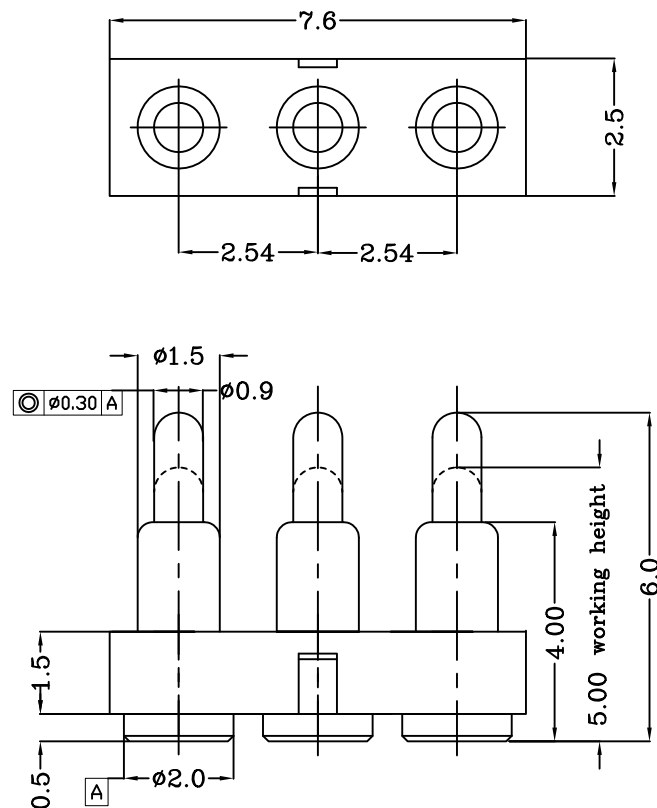

Notes:

- Material(材质):
Housing: High temp.Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire
- Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
- Mechanical:
Total stroke(总行程): 1.70mm
Durability(寿命): 10,000 cycle min.
- Electrical(电性能)
Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

USED ON

100632-3

PART NUMBER

MATL				HT TR —		FIN — 	
DWN		QIN		APVD		<i>top-Link</i> Electronics Top-Link Electronics Ltd.	
CHK		REL					
NAME BATTERY POGO CONNECTOR 3 POSITIONS							
PGC-1.5-6.0-R-3P-2.54PH							
SCALE	A4	DWG NO.		C-100632		SHEET	REV
1:1						1 OF 1	A

LDC	-
DIST	-

	NEW		2010/09/02
LTR	REVISION RECORD	APVD	DATE