





USED ON

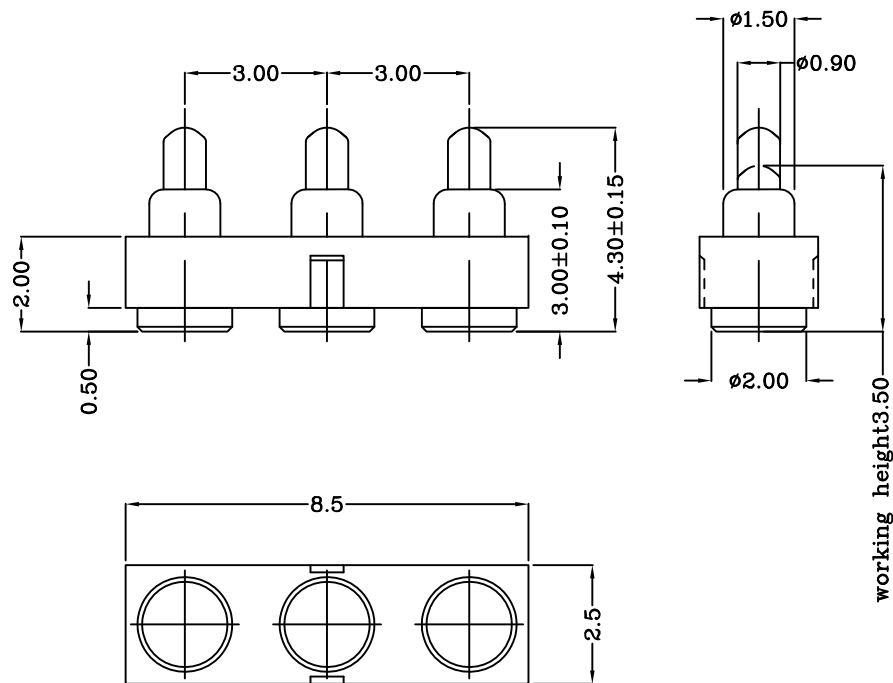

- Notes:
- Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
Spring: SUS304
 - Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um .
 - Mechanical
1)Total stroke : 1.0mm
2)Durability: 10,000 cycle min.
 - Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC
 - Spring force: 120±25gf at 0.8mm stroke

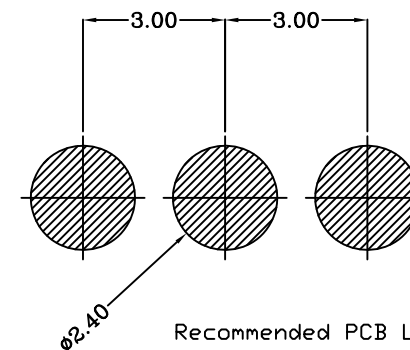

LDC	-
DIST	-

	NEW		2008/08/14
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	1	HT TR	—	FIN	— ✓
DWN	Benny	APVD	Lansing	top-Link Electronics Top-Link Electronics Ltd.	
CHK	Andy	REL			
NAMEPGO 3P PGC-1.5-4.3-R-3P-3.0PH					
SCALE	1:1	A4	DWG NO.	C-100110	SHEET 1 OF 1
					REV A

100110-3

PART NUMBER