

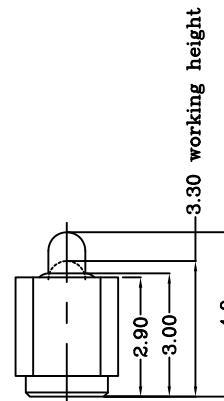


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

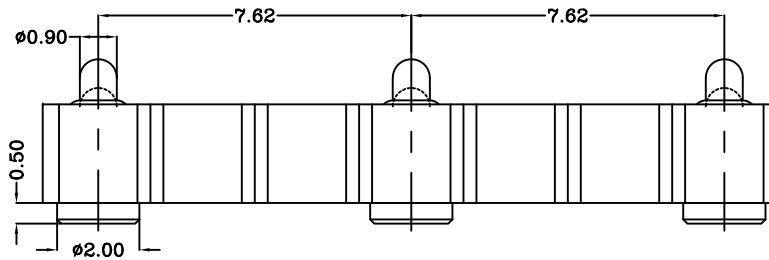

DWG NO.
C-110667

USED ON
—

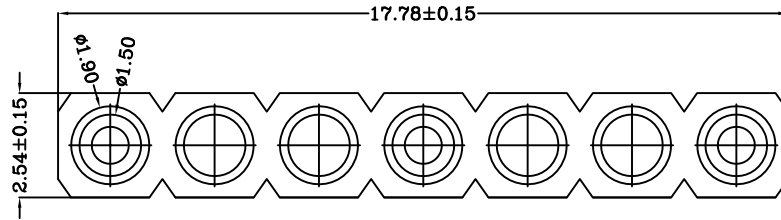

Notes:

1 Material(材质):

Housing: PA 4.6 (30% Glass Filled) Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Total stroke(总行程): 0.90mm

Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

Contact resistance(接触阻抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating(额定电流): 2.0A

LDC	-
DIST	-

	NEW		2008/03/19
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL		1		HT TR		FIN	
DWN		APVD		Top-Link Electronics Top-Link Electronics Ltd.			
CHK		REL					
NAME							
POGO CONNECTOR							
PGC-1.5-4.0-R-3P-7.62PH							
SCALE	A4	DWG NO.	SHEET			REV	
1:1		C-110667	1 OF 1			1	

110667-3

PART NUMBER

4

3

2

1