

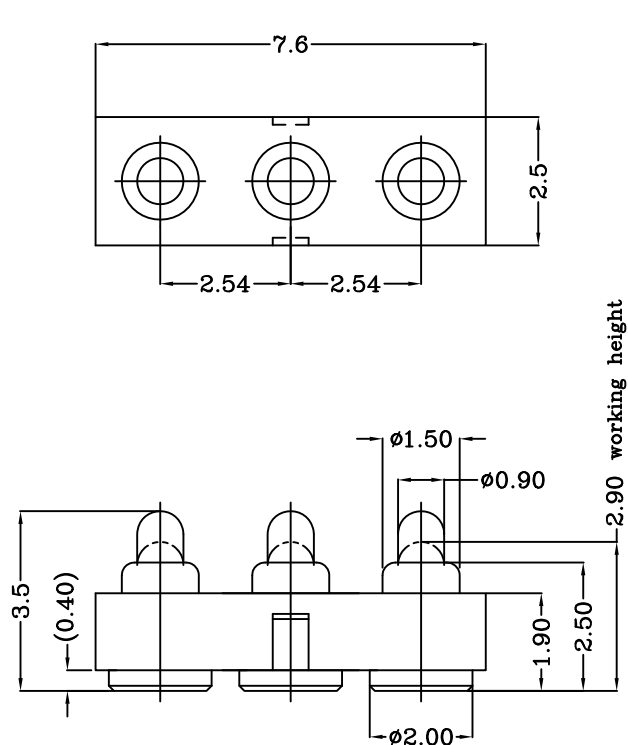
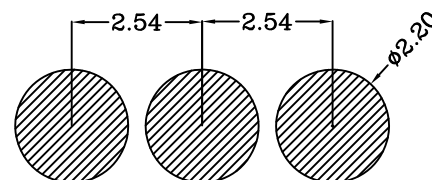


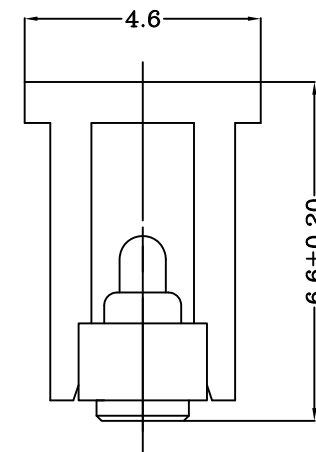

Notes:

- 1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
- 2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.
- 3 Mechanical
1)Total stroke : 0.8mm
2)Force: 100±30gf at 0.6mm stroke.

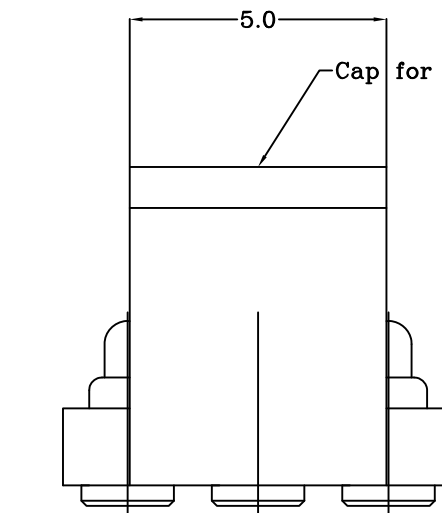

Recommended Solder paste thickness is 0.10 mm

Recommended PCB Layout

USED ON

100282-3

PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2/√ REMOVE BURRS . BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL		HT TR	—	FIN	— 		
	DWN	Benny	APVD	Lansing	 Top-Link Electronics Ltd.			
	CHK	Andy	REL					
	NAME BATTERY POGO CONNECTOR 3 POSITIONS PGC-1.5-3.5-R-3P-2.54PH							
	SCALE	1:1	A4	DWG NO.	C-100282	SHEET	1 OF 1	REV

LOC	-
DIST	-

	Update		2013/05/09
	NEW		2008/01/15
LTR	REVISION RECORD	APVD	DATE