
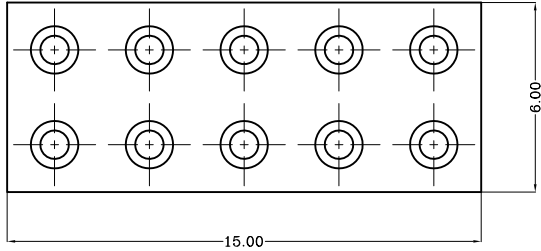



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-110849

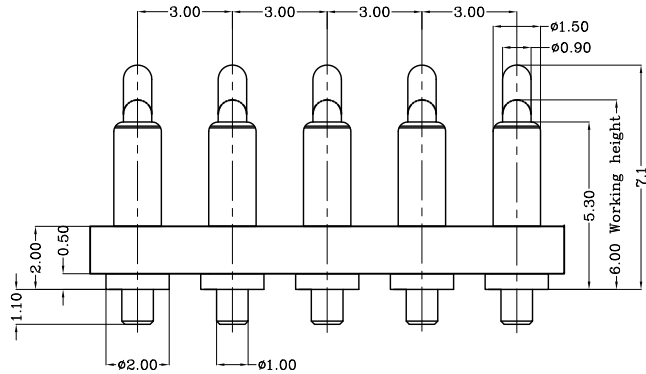

USED ON —

力量/工作高度对照表

高度 (mm)	力量 (gf)
工作高度: 6.0mm	90gf min

Notes:

- Material(材质):
Housing: High temp.Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire
- Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
- Mechanical:
Total stroke(总行程): 1.70mm
Durability(寿命): 10,000 cycle min.
- Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

110849-10

PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±— 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2/▽ REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL 		HT TR —		FIN — 		
	DWN Cai		APVD				
	CHK		REL				
	NAME POGO PIN CONNECTOR 10 POSITIONS PGC-1.5-7.1-2R-10P-3.0PH-3.0PH						
	SCALE 1:1		A4		DWG NO. C-110849		
				SHEET 1 OF 1		REV 3	

LDC	—
DIST	—

	Renewa		2013/11/29
	NEW		2012/05/14
LTR	REVISION RECORD	APVD	DATE

4

3

2

1

A

B

C

D