


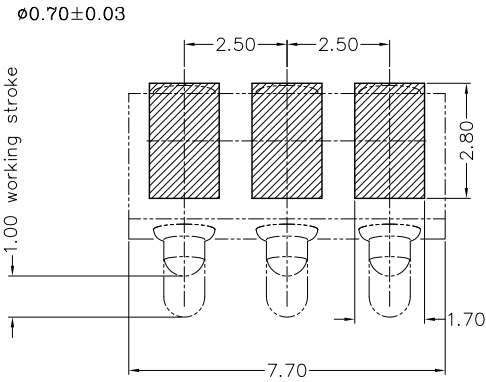
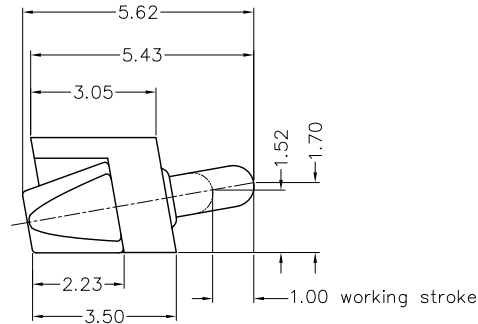


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

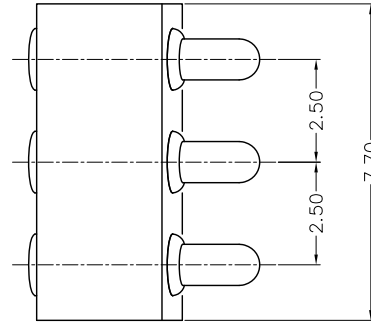


DWG NO.

C-100609

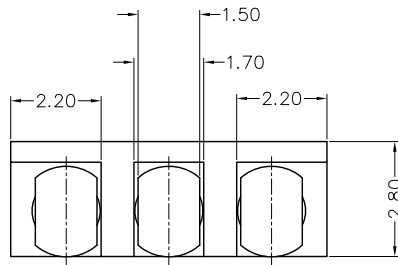

Recommended P.C.B.
layout (Component Side)



USED ON

—

Notes:

- Material, Housing: PA 4.6 (30% Glass Filled)
Color Black. (UL94V-0)
Contact: Brass
- Mechanical demands:
Spring force: 130 ±25 with 1.0mm stroke.
Full stroke: 1.5mm
Plating plunger: Min 0.4um Au over 1.4um Ni
Plating body: Min 0.1um Au over 1.4um .

LOC	-
DIST	-

	去排定位柱		2010/06/11
	变更结构		2010/06/10
	NEW		2010/06/07
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	
0	= ±—
0.0	= ±0.10
0.00	= ±0.10
0.000	= ±
ANGLE:	±1°
SURF TEXTURE:	3.2/ ▽
REMOVE BURRS . BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	

MATL		△ 1		HT TR —		FIN — ✓		
DWN		APVD		top-Link Top-Link Electronics Electronics Ltd.				
Qin								
CHK		REL						
NAME							BATTERY CONNECTOR 3 POS. WITH PILLAR	
							PGC-1.5-5.5-RA-3P-2.5PH	
SCALE		A4		DWG NO.		C-100609	SHEET	REV
1:1							1 OF 1	3

100609-3

PART NUMBER

A

B

C

D