USED ON
—

DWG NO. C-110640

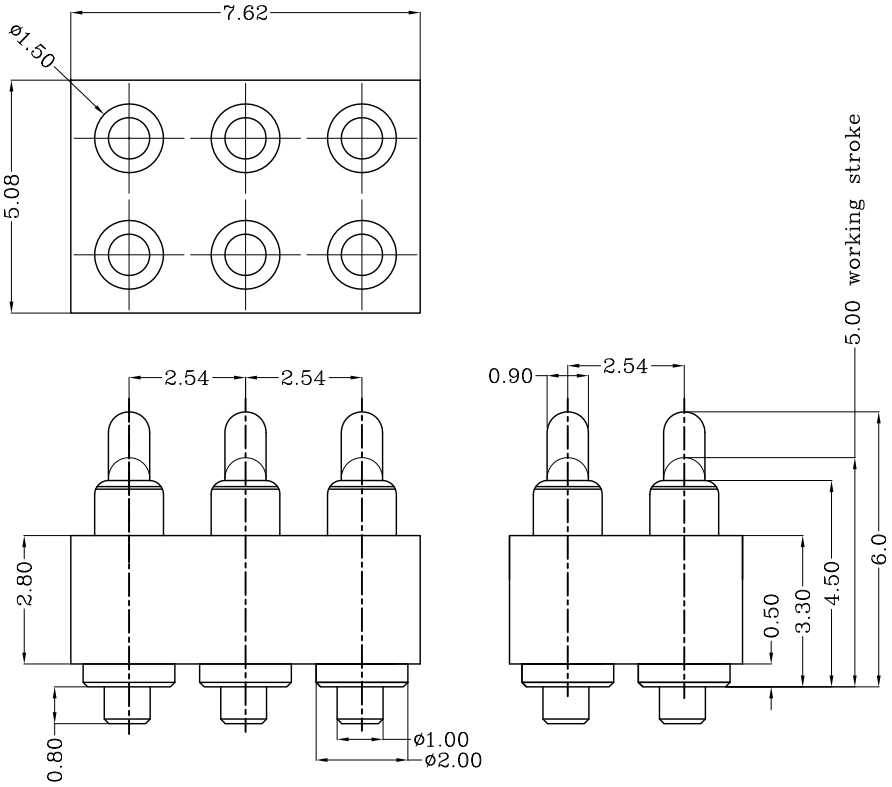

Notes:

1 Material(材质):
Housing: High temp.Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring :Stainless steel wire

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:
1)Force:135±25gf per pin at 1.0mm stroke
(力:下压1.0mm的力:135±25gf)
2)Total stroke(总行程): 1.40mm
3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)
Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

110640-6
PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
1	—	—

DWN	APVD	Top-Link Electronics Ltd.
Qin		
CHK	REL	

NAME: POGO CONNECTOR 6 POSITIONS
PGC-1.5-6.0-2R-6P-2.54PH

SCALE	A4	DWG NO.	SHEET	REV
1:1		C-110640	1 OF 1	A

LTR	REVISION RECORD	APVD	DATE
	NEW		2010/09/21

LOC -
DIST -

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT
NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT
WRITTEN AUTHORIZATION FROM TOP-LINK LTD.