


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.





DWG NO.

C-100418

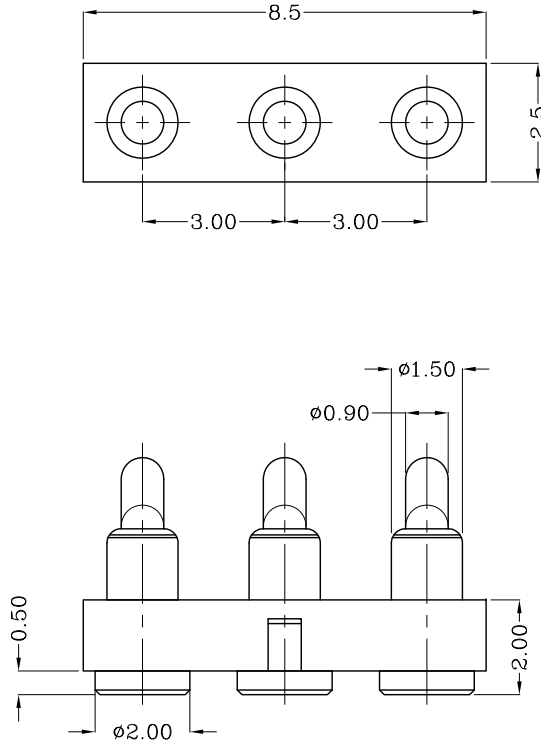

Notes:

- Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass
- Mechanical demands:
Plating Plunger: Min 0.4um Au over 1.4um Ni
Plating Body: Min 0.1um Au over 1.4um Ni.
- Electrical
a)Contact resistance: 30mOhm Max.
b)Current rating: 2.0A
c)Operating voltage: 36VDC
d)Force:150±30gf per pin at 1.00mm stroke

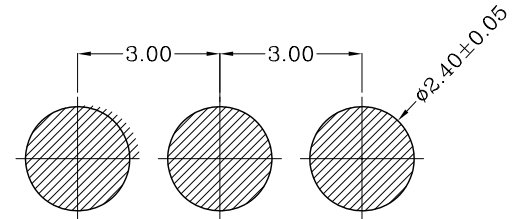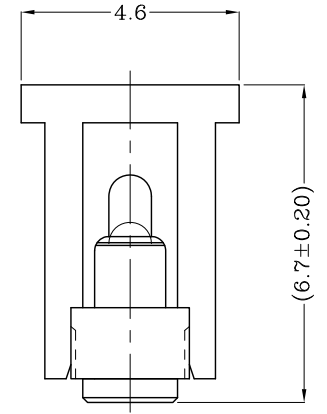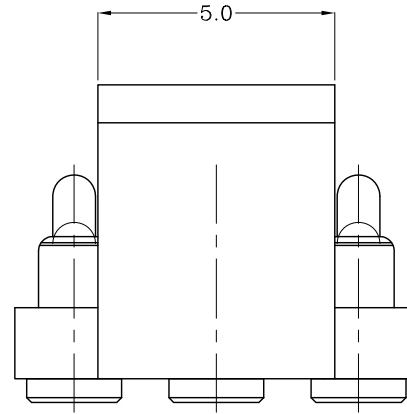

Recommended PCB Layout

USED ON

100418-3

PART NUMBER

FIN

top-Link
Electronics

Top-Link
Electronics Ltd.

MATL

HT TR

FIN

DWN

Qin

APVD

CHK

REL

NAME

PGGD 3P
PGC-1.5-5.0-R-3P-3.0PH

SCALE

1:1

A4

DWG

NO.

C-100418

SHEET

1 OF 1

REV

B

LDC

-

DIST

-

4

3

2

1